




TYPICAL SAG SECTION

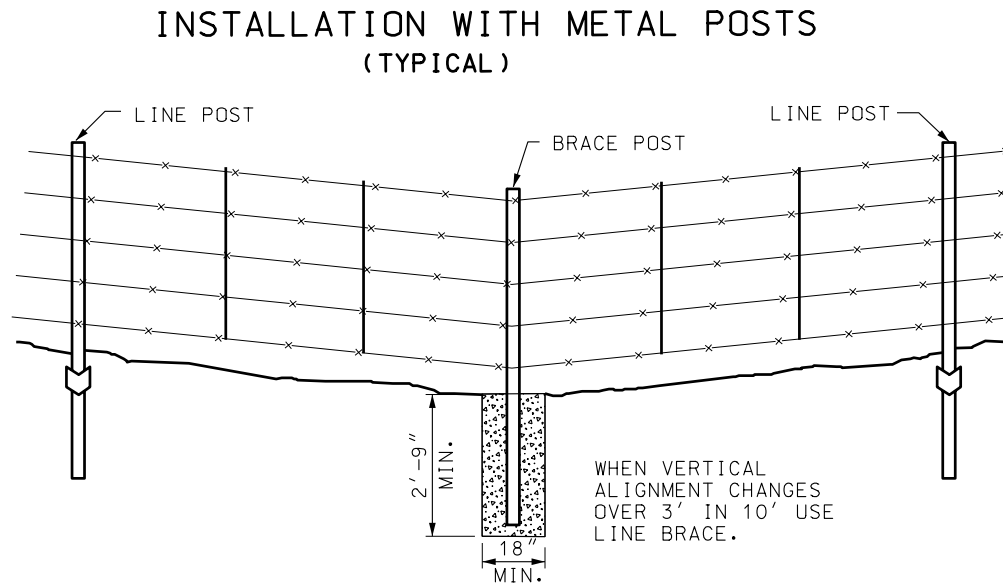

TYPICAL VERTICAL ALIGNMENT CHANGE

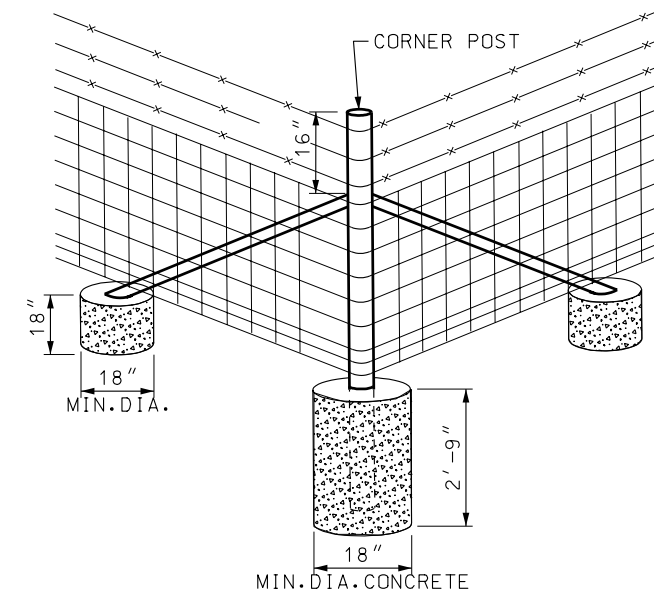


CORNER BRACE
SEE NOTE #6 STD DWG FG 2A

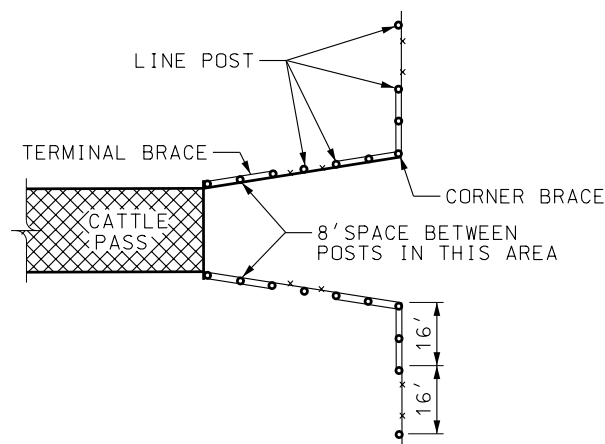


CATTLE PASS FENCE
DETAIL


DEER COUNTRY
NOTE: LAP THE 47" & 26" MESH WIRE 2".
TIE OR CLAMP 47" & 26" MESH WIRE
TOGETHER, THE SPACING NOT TO
EXCEED 2'-0" SPACING OF CONNECTINGS.

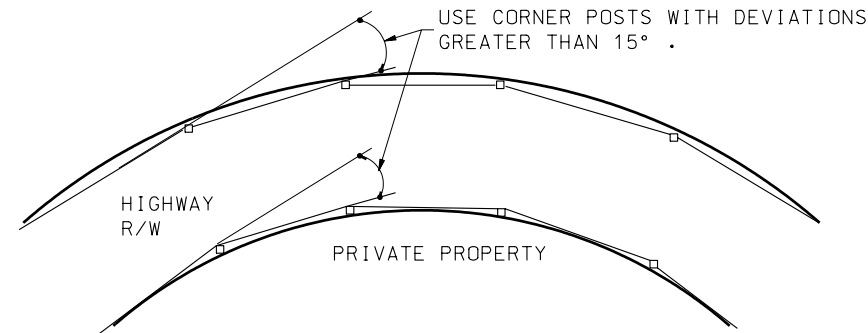

DEER BARRIER ON CURVES
SEE NOTE #6 STD DWG FG 2A

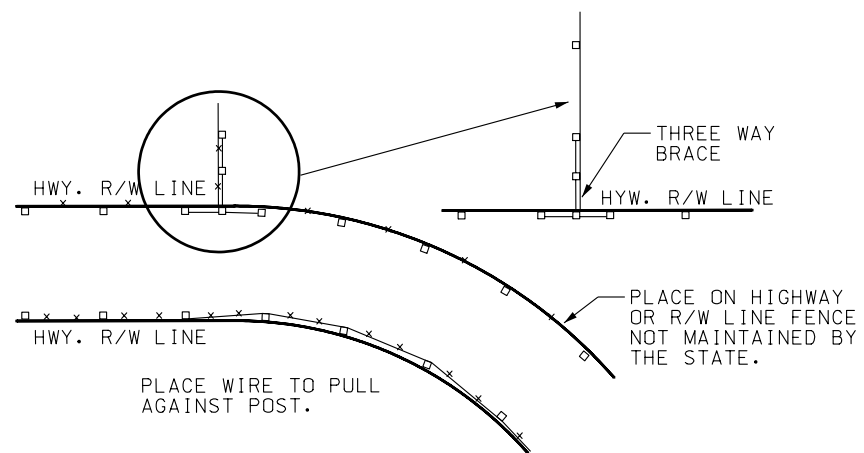

POST & WIRE LOCATION

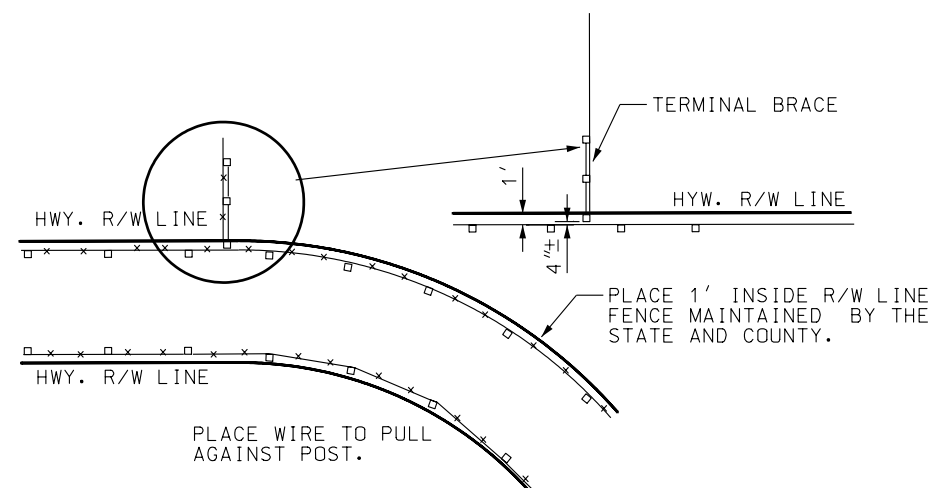

POST & WIRE LOCATION

REVISIONS

UTAH DEPARTMENT OF TRANSPORTATION
STANDARD DRAWINGS FOR ROAD AND BRIDGE CONSTRUCTION
SALT LAKE CITY, UTAH

RECOMMENDED FOR APPROVAL
JULY 03, 2002
DATE
CHAIRMAN STANDARDS COMMITTEE
JULY 03, 2002
DATE
DEPUTY DIRECTOR

RIGHT OF WAY
FENCE AND GATES
(METAL POST)

STD DWG
FG 2B

STANDARD DRAWING TITLE

REMARKS

NO. DATE APPR.